

$$X_3 = 0,2 \frac{6,3^2}{1,5} = 5,3 \Omega$$

$$X_1 = 0,05 \frac{6,3^2}{0,8} = 2,5 \Omega$$

$$X_2 = 0,05 \frac{6,3^2}{0,5} = 4,0 \Omega$$

$$MI: 2 \times 10^6 = \frac{q(1-q)}{f_N} \frac{6300^2}{R_{2e}}$$

$$q = 0,02$$

$$\Rightarrow R_{2e} = 939 \Omega$$

$$R_0 = 522,2 \Omega$$

$$Q_0 = \sqrt{(\sqrt{3} \cdot 6300 \times 100)^2 - 76000^2} = 1090 \text{ KVAR}$$


$$X_0 = 36,4 \Omega$$

2) MI em vazio $\Rightarrow P_{MI} = 76 \text{ kW}$ $Q_{MI} = 1090 \text{ KVAR}$.

I_{MS}^{max} / No Sobrecarga equipos:

$$\begin{cases} I_{M1} = \frac{800 \times 10^3}{\sqrt{3} \times 6300} = 73,4 \text{ A} \\ I_{M2} = \frac{500 \times 10^3}{\sqrt{3} \times 6300} = 45,9 \text{ A} \end{cases}$$

$$\Rightarrow I_{MS}^{max} = I_{M1} + I_{M2} = 119,3 \text{ A}$$

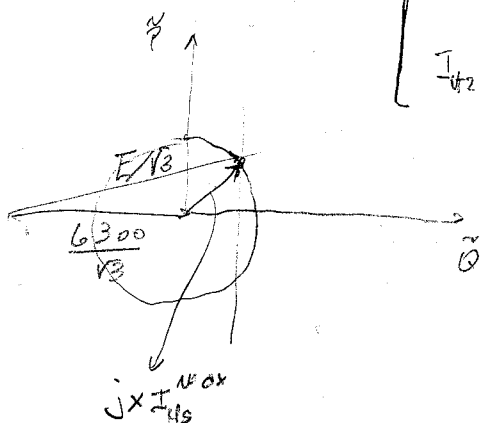

$$x = \frac{4 \times 35}{4 + 25} + 5,3 = 6,84 \Omega$$

$$\tilde{Q} = \frac{1 \times 10^6 \times 6,84}{\sqrt{3} \times 6300} = 627,6$$

$$\Rightarrow \tilde{P} = \sqrt{(119,3 \times 6,84)^2 - 627,6^2} = 525,5 = \frac{6,84 \times P}{\sqrt{3} \times 6300}$$

$$\Rightarrow P_{MS} = 831 \text{ kW}$$

$$\Rightarrow \begin{cases} P_{red} = P_{MI} - P_{MS} = -755 \text{ kW} \\ Q_{red} = Q_{MI} - Q_{MS} = 90 \text{ kW} \end{cases}$$

$$E = \sqrt{3} \times \sqrt{(6300/\sqrt{3} + \tilde{Q})^2 + \tilde{P}^2} = \sqrt{3} \times 43001 = 7441 \text{ V}$$

$$\Rightarrow \boxed{E \approx 2362 \text{ V}} \Rightarrow \boxed{i \leq 2,4 \text{ A}}$$

$$\frac{6300^2 \times q}{557 \times 939} = 0,88 \times 1500(1-q) \rightarrow 49q = 1-q \rightarrow 50q = 1 \Rightarrow q = 0,02$$

$$\Rightarrow P_{MI} = 2 \text{ MW} + 0,076 \text{ MW} = 2,076 \text{ MW}$$

$$Q_{MI} = 1090 \text{ KVAR}$$




$$P_{MS} = 831 \text{ kW}$$

$$Q_{MS} = 1 \text{ MVAR}$$

$$\Rightarrow P_{red} = 1245 \text{ kW}$$

$$Q_{red} = 90 \text{ kW}$$

$$\cos \phi = 0,999$$

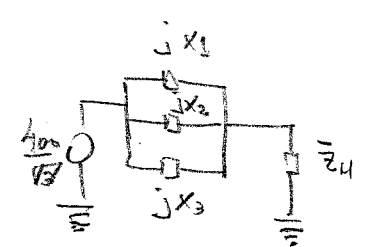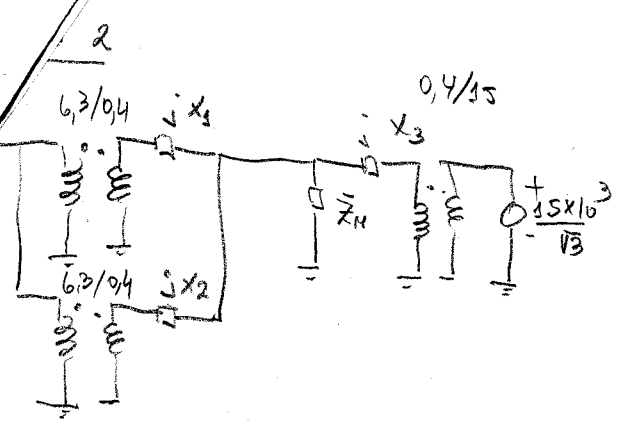

$$X_{tot} = X_1 // X_2 // X_3$$

$$X_1 = 0,06 \times \frac{400^2}{300 \times 10^3} = 0,032 \Omega$$

$$X_2 = 0,04 \times \frac{400^2}{200 \times 10^3} = 0,032 \Omega$$

$$X_3 = 0,08 \times \frac{400^2}{400 \times 10^3} = 0,032 \Omega$$

$$\Rightarrow X_{tot} = \frac{0,32}{3} = 0,107 \Omega$$


$$MI: Z_{ca} = \frac{100 \sqrt{3}}{480} \angle \arccos\left(\frac{12000}{\sqrt{3} \times 100 \times 480}\right) = 0,12 \angle 81,7^\circ = 0,017 + j 0,118 \Rightarrow jX_{tot} + Z_{ca} = 0,13 \angle \varphi$$

$$I_{Acc} = \frac{400 \sqrt{3}}{0,13 \angle \varphi} = 1778,6 A \angle -\varphi \Rightarrow V_H = 213,4 V \Rightarrow U_H = 369,2 V$$

$$2) X_0 = \frac{400 \sqrt{3}}{200} = 1,16 \Omega \quad \varphi = \frac{1500 - 1455}{1500} = 0,03 \quad \bar{Z}_H = j 1,16 // \left(R_1 + \frac{R_{2e}}{f} + j 0,118 \right)$$

$$R_1 = R_{2e} = 8,5 \times 10^{-3} \Omega \Rightarrow \frac{R_{2e}}{f} = 0,28 \Omega \Rightarrow R_1 + \frac{R_{2e}}{f} = 0,3 \Omega$$

$$\Rightarrow \bar{Z}_H = 0,28 \angle 34,68^\circ = 0,23 + j 0,16$$

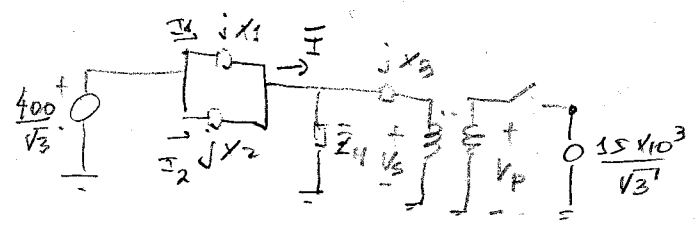

$$jX_1 // jX_2 = j 0,016 \Omega$$

$$I = \frac{400 \sqrt{3}}{j 0,016 + 0,23 + j 0,16} = \frac{234,2}{0,23 + j 0,032} = 797,2 \angle -9,29^\circ$$

$$\Rightarrow I = 797,2 A \Rightarrow V_s = 797,2 \times 0,28 = 223,2 V \Rightarrow U_s = 386,1 V \Rightarrow U_p = 1447,9 V$$

No es admisible este funcionamiento.

$$I_1 = I_2 = \frac{797,2}{2} = 398,6 A$$

$$I_{N1} = \frac{300 \times 10^3}{\sqrt{3} \times 400} = 433,5 A$$

$$I_{N2} = \frac{200 \times 10^3}{\sqrt{3} \times 400} = 288,7 A$$

$$\eta_1 = 92\%$$

$$\eta_2 = 130\%$$